


Series 4, Wall-mounted cooker hood, 90 cm, Black DWB97BK61T

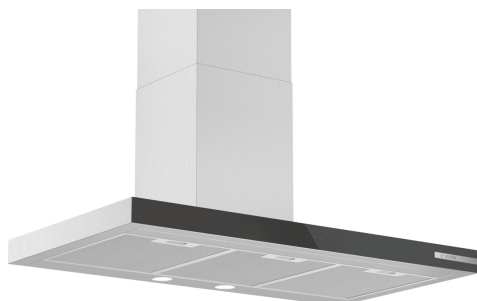

DWZ9HB1U2 Recirculating kit

The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.

- Converts to Recirculation Mode with Accessory Kit (Separate Purchase Required)
- Absorbs odors with Charcoal Replacement Filters (Available for sale)
- Ducted or Non-ducted Options

Color chimney: Stainless steel
 Typology: Wall-mounted
 Length electrical supply cord: 200.0 cm
 Height of the chimney: 550-725/550-830 mm
 Height of product, without chimney: 53 mm
 Net weight: 16.4 kg
 Type of control: Electronic
 Number of speed settings: 3-stages + intensive setting
 Max. air extraction: 582 m³/h
 Boost position output recirculating: 508.0 m³/h
 Max. air recirculation: 480 m³/h
 Boost position air extraction: 779 m³/h
 Number of lights: 2
 Noise level: 66 dB(A) re 1 pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable aluminium
 Odour filter: No
 Operating Mode: Exhaust / Recirculation (Accessory available separately)
 Optional accessories: DWZ9HB1U2
 Type of lamps used: LED
 Total power of the lamps: 6 W
 Grease filter type: Kassette
 Clean filter reminders: No
 Connection rating: 281 W
 Voltage: 220-240 V
 Frequency: 50-60 Hz
 Plug type: No plug (electrical connection by electrician)
 Installation typology: Wall-mounted
 Material body: Stainless steel
 Plug type: No plug (electrical connection by electrician)
 Dimensions of the product, with chimney (if exists) (in): x x
 Dimensions of the packed product: 22.44 x 39.37 x 18.11
 Net weight: 36.000 lbs
 Gross weight: 54.000 lbs
 Motor location: Integrated motor in hood chimney
 No-return airflow flap: Yes
 Length electrical supply cord: 200.0 cm
 Dimensions of the product, with chimney (if exists): 550-830 x 898.0 x 500.0 mm
 Dimensions of the packed product (HxWxD): ... 570 x 1000 x 460 mm
 Net weight: 16.4 kg
 Gross weight: 24.4 kg



**Series 4, Wall-mounted cooker hood,
90 cm, Black
DWB97BK61T**

**The wall-mounted chimney hood: mount it
on the wall, giving you complete freedom
in your kitchen planning.**

Variant

- Wall mounted hood
- Pyramidal design

Design

- Push button controls with Electronic display
- Metal grease filter, dishwasher safe

Technical information


- 3 speeds plus intensive setting
- Extraction rate exhaust air according to EN 61591 max. 328 m³/h
- 2 x LED spot 2,15W (low volt)
- Suitable for ducted or re-circulated extraction
- For recirculated extraction standard recirculation kit (accessory) needed

Comfort


Measures:

- 90 cm wide
- Dimensions exhaust air (HxWxD): 450-830 x 898 x 500 mm
- Dimensions recirculating (HxWxD): 550-830 x 898 x 500 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)

© 2010 Blackwell Publishing Ltd *Journal of Internal Medicine* 267: 103–111

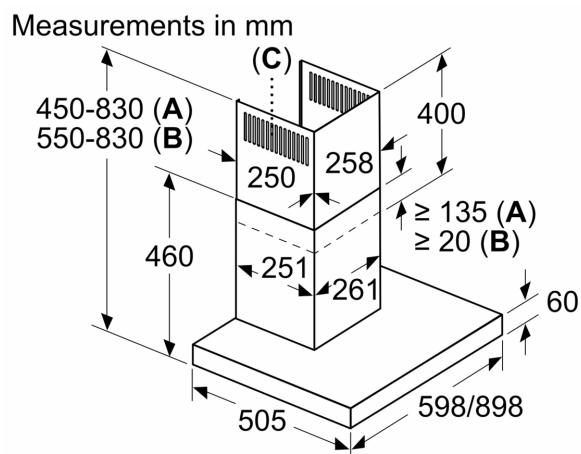


A: Exhaust air
B: Circulated air
C: Air outlet – slots for exhaust air to be mounted facing down

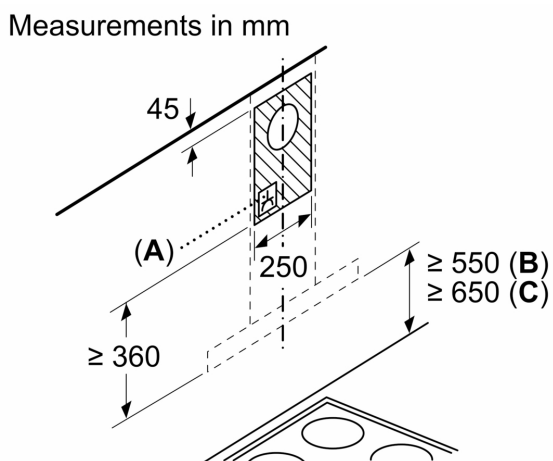


A: Socket
From upper edge of pan support

B: Electric
C: Gas

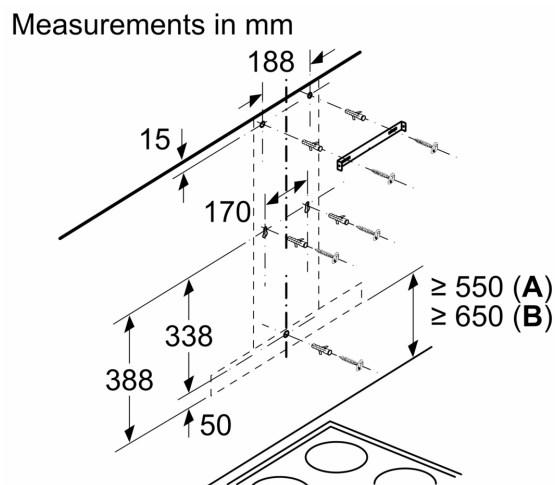

From upper edge of pan support

A: Electric
B: Gas

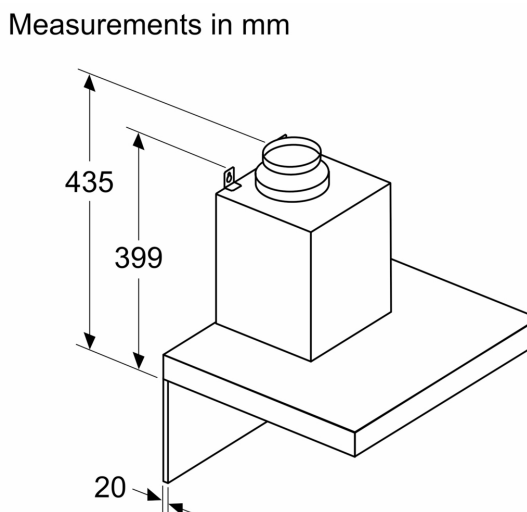

If a back panel is used, the design of the appliance must be considered