



AW240191

AA200110:

Repl. filter for AA200812/816, AA010810

AA200112:

Activated charc. filter for AA200812/816

AA200812:

Recirculation module w.active charcoal

AD200392:

Ceiling Collar Stainless Steel Wall

Wall-mounted hood 200 series

90 cm, Stainless steel

AW240191

Stainless steel hood with glass cover fitting to oven 200 series

Highly efficient vapour collection by recessed filters

Energy-saving, low-noise fan

Perforated sheet metal filter with high grease absorption

Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours

Dimmable, neutral white LED light for ideal illumination of the cooktop

Air extraction or air recirculation system

Output

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591. Sound power level according to EN 60704-3.

Air extraction:

618 / 971m³/h.

64 / 73 dB (A) re 1 pW.

Air recirculation:

383 / 476m³/h.

69 / 74 dB (A) re 1 pW.

Features

3 electronically controlled power levels and 1 intensive mode.

Automatic function with sensor-controlled run-on function.

Grease filter saturation indicator.

Activated charcoal filter saturation indicator.

Perforated sheet metal filter, dishwasher-safe.

Interval ventilation, 6 min.

Neutral white LED light (3500 K), continuously dimmable.

Light colour in different white tones (2700 - 5000 K) can be adjusted via Home Connect.

Lamp output 3 x 3 W.

Illuminance 551 lx continuously dimmable.

Fan technology with highly efficient, brushless DC motor (BLDC).

Airflow-optimised vapour collection area with slightly inward facing filters.

The package includes an one-way flap.

Easy mounting system for simple installation and alignment.

Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable cooktop).

Remote control and monitoring.

Remote diagnostics.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Consumption data

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Energy consumption 45.1 kWh/year.

Ventilation efficiency class A.

Illumination efficiency class A.

Grease filter efficiency class B.

Sound level min. 44 dB / max. 64 dB normal mode.

Planning notes

The equivalent ducting length to ensure good performance is Lmax 26 m.

The package includes the two-part chimney with the dimensions from 572 mm to 874 mm.

Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).

Clearance above electric appliances min. 55 cm.

For air recirculation an external air recirculation module is required.

The air recirculation module with activated charcoal filter can be installed on the inner chimney.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection


Total connected load 269 W.

Connecting cable 1.3 m with plug.

Power consumption standby/display off 0.5 W.


Please check the user manual for how to switch off the WiFi module.

AW 240 with AA 200 812

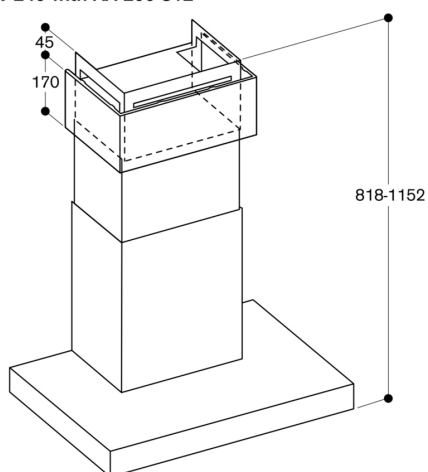


* Suitable for ceiling heights from 2.45 m to 2.75 m;
Specifications refer to the distance of 1.60 m from the floor
to the lower edge of the hood.

AW 240 with AD 200 322

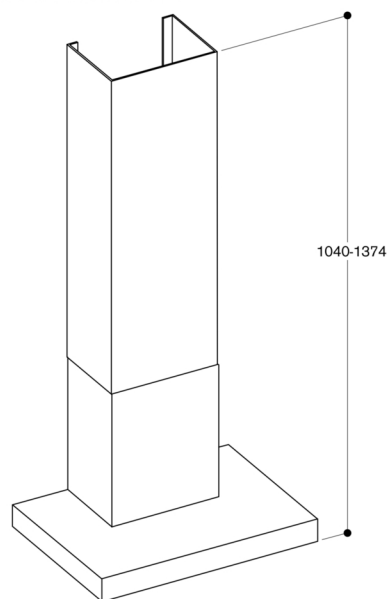

* Suitable for ceiling heights from 2.64 m to 2.97 m;
Specifications refer to the distance of 1.60 m from the floor
to the lower edge of the hood.

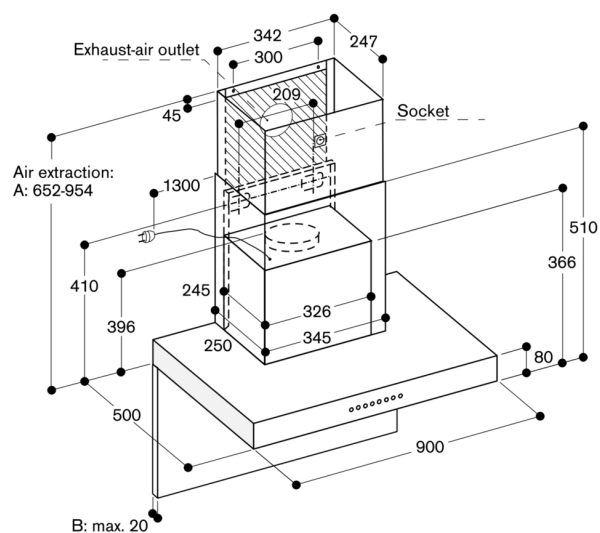

A: Suitable for ceiling heights from 2.25 m to 2.55 m;
Specifications refer to the distance of 1.60 m from the floor
to the lower edge of the hood.
B: Note the maximum thickness of the back panel.