



AI240191

AA200110:

Repl. filter for AA200812/816, AA010810

AA200112:

Activated charc. filter for AA200812/816

AA200816:

Recirculation module w. active charcoal

AD200326:

Chimney elongation stainless steel

AD220396:

Ceiling Collar Stainless Steel Island

AD223346:

Extension for mounting kit 500 mm

AD223356:

Adapter for roof inclination left/right

AD223366:

Adapter for roof inclination front/back

island cooker hood 200 series

90 cm, Stainless steel

AI240191

Energy-saving, low-noise fan

Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours

Dimmable, neutral white LED light for ideal illumination of the whole cooktop

Air extraction or air recirculation system

Output

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591. Sound power level according to EN 60704-3. Sound pressure level according to EN 60704-2-13. Odour reduction for air recirculation in accordance with EN 61591.

Odour reduction air recirculation 85 %.

Features

3 electronically controlled power levels and 1 intensive mode.

Automatic function with sensor-controlled run-on function.

Grease filter saturation indicator.

Activated charcoal filter saturation indicator.

Interval ventilation, 6 min.

Cooktop-based ventilation control (with suitable cooktop).

Neutral white LED light (3500 K), continuously dimmable.

Lamp output 4 x FM5-04_LED_3W.

Fan technology with highly efficient, brushless DC motor (BLDC).

Integrated sound insulation for quiet operation.

The package includes an one-way flap.

Easy mounting system for simple installation and alignment.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Consumption data

Energy consumption 49.5 kWh/year.

Ventilation efficiency class A.

Illumination efficiency class A.

Grease filter efficiency class B.

Sound level min. 43 dB / max. 64 dB normal mode.

Planning notes

The package includes the mounting kit and the two-part chimney with the dimensions from 664 mm to 844 mm. Individual planning solutions can be implemented using the special accessory chimney extension AD 200 326 in combination with extension for mounting kit AD 223 346.

Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).

Clearance above electric appliances min. 55 cm.

The air recirculation module with activated charcoal filter can be installed on the inner chimney.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection


Total connected load 272 W.

Connecting cable 1.3 m with plug.

Power consumption standby/display off 0.5 W.


Please check the user manual for how to switch off the WiFi module.

AI 240 with AA 200 816

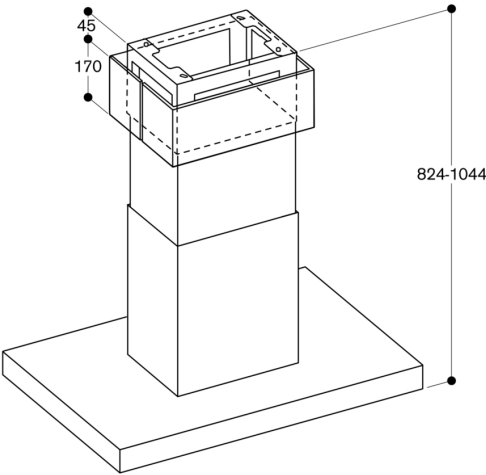


* Suitable for ceiling heights from 2.42 m to 2.64 m;
Specifications refer to the distance of 1.60 m from
the floor to the lower edge of the hood.

AI 240 with AD 200 326 and AD 223 346

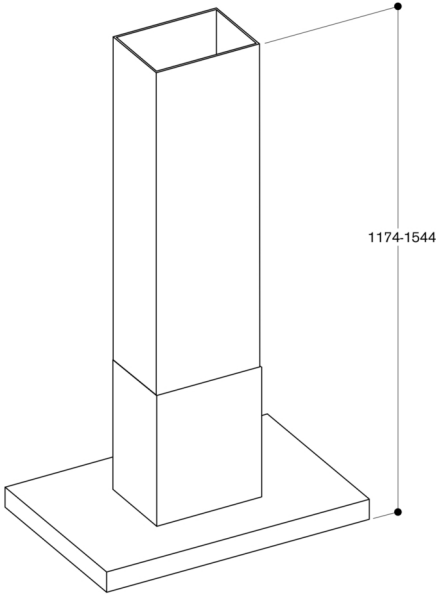

* Suitable for ceiling heights from 2.78 m to 3.15 m;
Specifications refer to the distance of 1.60 m from the floor
to the lower edge of the hood.

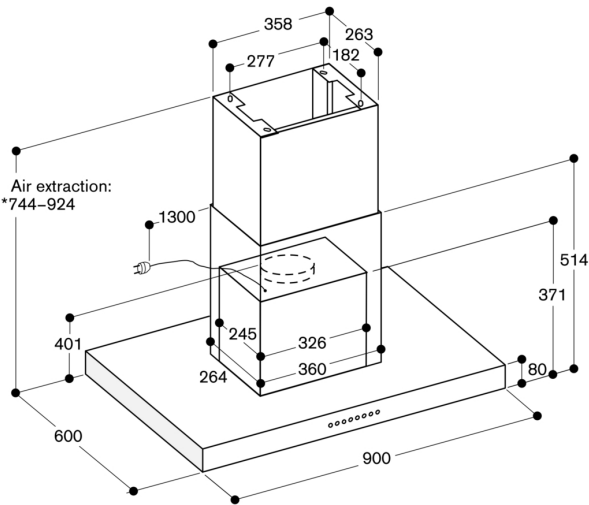

* Suitable for ceiling heights from 2.34 m to 2.52 m;
Specifications refer to the distance of 1.60 m from
the floor to the lower edge of the hood.