

DAS 2620 Slimline cooker hood with EasySwitch controls for convenient operation



- Classic design – stainless steel panel, 60 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Recirculation mode – Active AirClean or Longlife AirClean filter



EAN: 4002516467021 / Material number: 11878170 /
Old Material Number: 28S2620SGB

Construction type	
Slimline cooker hood	•
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151, DUU 150
Active charcoal filter (order separately)	DKFS 31-R, DKFS 31-900 P
Design	
Colour	Stainless steel
User convenience	
Electronic controls	•
Booster levels	1
Efficiency and sustainability	
Annual energy consumption in kWh/year	41.7
Energy efficiency class (A+++ – D)	A
Grease filtering efficiency class	A
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Cleaning and care	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
Lighting	
Number x W	1 x 3,2 W
Light intensity in lx	310 lx
Colour temperature in K	3500 Kelvin
Fan	
Dual-action blower	•
AC motor	•
Exhaust air	
Air throughput in Level 1 (m³/h) according to EN 61591	195
Air throughput in Level 2 (m³/h) according to EN 61591	295
Air throughput in Level 3 (m³/h) according to EN 61591	410
Air throughput in Booster level 1 (m³/h) according to EN 61591	555
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	55.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	61.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	68.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	34.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	41.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	47.0

DAS 2620
Slimline cooker hood
with EasySwitch controls for convenient operation



EAN: 4002516467021 / Material number: 11878170 /
Old Material Number: 28S2620SGB

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13 54.0

Recirculation

Air throughput in Level 1 (m³/h) according to EN 61591	190
Air throughput in Level 2 (m³/h) according to EN 61591	290
Air throughput in Intensive level (m³/h) according to EN 61591	550
Air throughput in Level 3 (m³/h) according to EN 61591	415
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	53.0
Noise power level in Intensive level (dB(A) re 1 pW) according to EN 60704-3	74.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	60.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	68.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	46.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	54.0
Noise pressure level in Intensive level (dB(A) re 20 µPa) according to EN 60704-2-13	61.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	39.0

Safety

Safety switch-off •

Technical data

Canopy width in mm	596
Canopy height in mm	36
Canopy depth in mm	273
Net weight in kg	12.0
Length of supply lead in m	1.5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1
Total rated load in kW	0.20
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50

Installation notes

Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150


Accessories included

Non-return flap •

DAS 2620

Slimline cooker hood

with EasySwitch controls for convenient operation

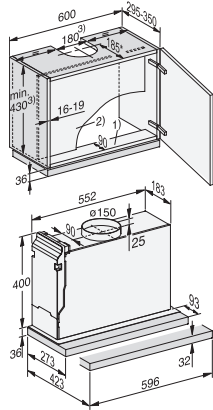

DAS2620, DAS2622 Living, DAS2620 EXTA, DAS4620,
Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. , 2) If a partition wall is to be provided in the unit, it must be removable. , 3) Extraction, recirculation with conversion kit DUU 150. , * In this installation situation, the deflector plate is flush with the front edge of the housing unit carcass. , If you wish to position the cooker hood further forward or further back (e.g. because it has a front panel), dimensions have to be adapted accordingly. , Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).